

AD-753 348

MEAN HORIZONTAL WIND SPEED AND
DIRECTION VARIABILITY AT HEIGHTS OF
1.5 AND 4.0 METERS ABOVE GROUND LEVEL
AT WSMR, NEW MEXICO

L. J. Rider, et al

Army Electronics Command
White Sands Missile Range, New Mexico

October 1972

DISTRIBUTED BY:



National Technical Information Service
U. S. DEPARTMENT OF COMMERCE
5285 Port Royal Road, Springfield Va. 22151



AD 753348

AD

Reports Control Symbol
OSD-1366

RESEARCH AND DEVELOPMENT TECHNICAL REPORT
ECOM-5466

**MEAN HORIZONTAL WIND SPEED AND
DIRECTION VARIABILITY AT HEIGHTS OF
1.5 AND 4.0 METERS ABOVE GROUND
LEVEL AT WSMR, NEW MEXICO**

By

L. J. Rider

Manuel Armendariz

October 1972

Approved for public release; distribution unlimited.

.....
ECOM

UNITED STATES ARMY ELECTRONICS COMMAND - FORT MONMOUTH, NEW JERSEY

Reproduced by
**NATIONAL TECHNICAL
INFORMATION SERVICE**
U.S. Department of Commerce
Springfield VA 22151

30

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The citation of trade names and names of manufacturers in this report is not to be construed as official Government endorsement or approval of commercial products or services referenced herein.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

A handwritten mark or signature consisting of a vertical line with a diagonal stroke extending from the top right.A handwritten mark or signature consisting of a stylized 'A' shape with a horizontal line extending to the right.

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotations must be entered when the overall report is classified.)

1. ORIGINATING ACTIVITY (Corporate Author)	2a. REPORT SECURITY CLASSIFICATION
Atmospheric Sciences Laboratory White Sands Missile Range, New Mexico	Unclassified
2b. GROUP	

3. REPORT TITLE	MEAN HORIZONTAL WIND SPEED AND DIRECTION VARIABILITY AT HEIGHTS OF 1.5 AND 4.0 METERS ABOVE GROUND LEVEL AT WSMR, NEW MEXICO
-----------------	--

4. DESCRIPTIVE NOTES (Type of report and inclusive dates)	
---	--

5. AUTHORISER (First name, middle initial, last name)	
---	--

L. J. Rider and Manuel Armendariz

6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
October 1972	47-30	7
8a. CONTRACT OR GRANT NO.	9a. ORIGINATOR'S REPORT NUMBER(S)	
	EGON-5466	
8b. PROJECT NO.	9b. OTHER REPORT NUMBER(S) (Any other numbers that may be assigned this report)	
c. DA Task No. 1T061102BD3A-17		
d.		

10. DISTRIBUTION STATEMENT	
----------------------------	--

Approved for public release; distribution unlimited.

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
	US Army Electronics Command Fort Monmouth, New Jersey

13. ABSTRACT

The general characteristics of wind speed and direction variability at heights of 1.5 and 4.0 meters are presented as functions of space, time, averaging time of data, mean wind speed, lag time, thermal stability (between 0.5 and 4.0 meters), and orientation of sensor line relative to mean wind direction. In addition, there is an example of mean longitudinal and lateral wind component differences and standard deviation as a function of horizontal distance separation at a height of 4.0 meters.

The data show wind speed differences of less than 0.8 mps for distance separations between instruments of 150 to 175 meters and the mean wind speed less than 5 mps. Wind direction differences vary from 10 to 50 degrees. Moreover, it is shown that the standard deviation of the longitudinal wind differences has the same general characteristics as the wind speed, whereas the standard deviation of the lateral wind is similar to the wind direction.

DD FORM 1 NOV 68 1473 REPLACES DD FORM 1673, 1 JAN 64, WHICH IS
OBSOLETE FOR ARMY USE.

UNCLASSIFIED

Security Classification

Ta.

UNCLASSIFIED
Security Classification

16 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
1. Surface wind 2. Variability 3. Time and space variation 4. Diffusion						

UNCLASSIFIED
Security Classification

T-6

Reports Control Symbol
OSD-1366

Technical Report ECOM-5466

MEAN HORIZONTAL WIND SPEED AND DIRECTION
VARIABILITY AT HEIGHTS OF 1.5 AND 4.0 METERS
ABOVE GROUND LEVEL AT WSMR, NEW MEXICO

By

L. J. Rider

Manuel Armendariz

Atmospheric Sciences Laboratory
White Sands Missile Range, New Mexico

September 1972

DA Task No. 1T061102B53A-17

Approved for public release; distribution unlimited.

U. S. Army Electronics Command

Fort Monmouth, New Jersey

E.C.

FOREWORD

This study was undertaken in response to a request by the Selected Systems Effectiveness Program (SSEP) of the Joint Technical Coordinating Group for Munitions Effectiveness. The paper depicts the general characteristics of wind variability subject to space, time, averaging time of the data, height of measurement, wind speed, temperature difference, and orientation of sensor line relative to the mean wind direction. The study cannot be all-inclusive since data utilized were collected at White Sands Missile Range and cannot depict all types of terrain. Moreover, the data generally cover wind regimes under 10 meters per second and temperature differences over a small range, i.e., -1.34 to a +2.25 degrees Celsius.

CONTENTS

	Page
INTRODUCTION.....	1
DISCUSSION OF RESULTS.....	1
SUMMARY.....	17
LITERATURE CITED.....	19

INTRODUCTION

Wind variability plays a major role in predicting the impact point of an unguided rocket and in the prediction of diffusion of toxic contaminants. In the past, studies on wind variability have been directed, for the most part, toward determining an optimum "simple sampling" of the wind (see for example, Beer and Sarrubbi [1], Hertz and Beer [2], Rachele [3], Karna et al. [4], and Rachele and Armendariz [5]). The term "simple sampling" is defined as the determination of an averaged wind obtained over a certain time interval. This averaged wind, measured at a given point and for a given time, serves as a predictor for another wind measurement made at a position which is removed horizontally and the measurement made at the same time or sometime later.

The purpose of this report is to present the variability of the wind speed and direction at heights of 1.5 and 4.0 meters as a function of horizontal distance separation between sensors, time, averaging time of the data, mean wind speed (taken from the predictor station), lag time, thermal stability, and orientation of sensor line relative to the mean wind. The idea is to make a measurement at some position A and compare this measurement to one made at some position B. Position B is horizontally removed between 25 and 300 meters from A and measurements are made either simultaneously with A or with a time lag. Variability is defined as the standard deviations of the absolute differences between the measurements of the wind taken at two separate positions.

Mean absolute differences of horizontal wind speed and direction at heights of 1.5 and 4.0 meters above ground and mean temperature difference between 0.5 and 4.0 meter heights were computed from more than 150 hours of data collected at selected times during January and March 1970 from the T-Array at White Sands Missile Range. Averaging time and lag time were varied, and data were classified into downwind and crosswind with respect to the mean wind direction. The T-Array consists of fast-response wind and temperature sensors placed at heights of 0.5, 1.5 and 4.0 meters and separated horizontally 25 to 300 meters along two perpendicular lines in the configuration of a T. Additional details concerning the T-Array may be found by referring to Armendariz et al. [6].

DISCUSSION OF RESULTS

Horizontal distance separation of the sensors varies from 25 to 300 meters. Figures 1 through 4 illustrate the effect of mean wind speed changes upon the mean speed and direction differences at heights of 1.5 and 4.0 meters at a near-midpoint horizontal difference separation. In Figures 1 and 2, the sensor height is 1.5 meters, horizontal distance separation

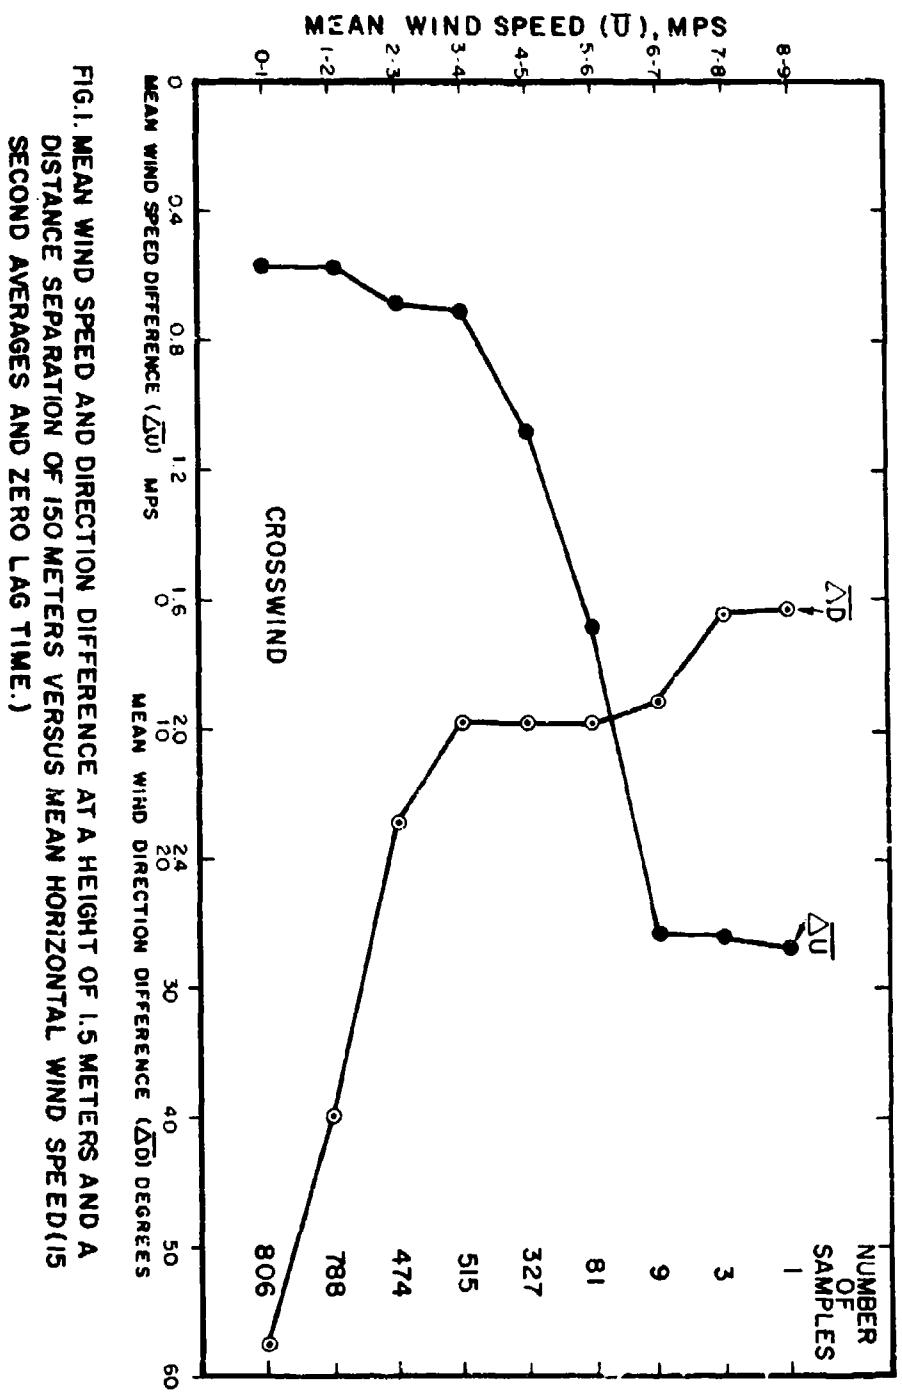


FIG. 1. MEAN WIND SPEED AND DIRECTION DIFFERENCE AT A HEIGHT OF 1.5 METERS AND A DISTANCE SEPARATION OF 150 METERS VERSUS MEAN HORIZONTAL WIND SPEED (15 SECOND AVERAGES AND ZERO LAG TIME.)

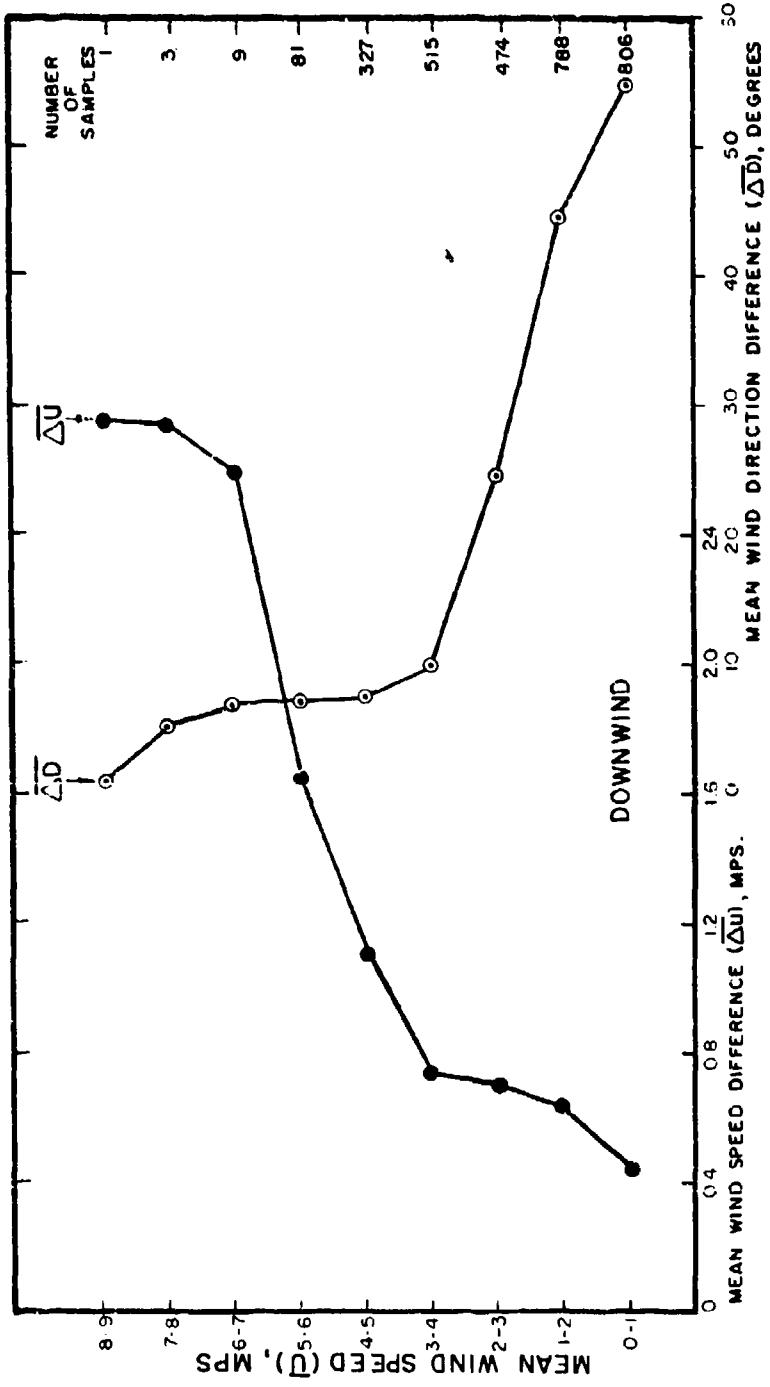


FIG. 2. MEAN WIND SPEED AND DIRECTION DIFFERENCE AT A HEIGHT OF 1.5 METERS AND A DISTANCE SEPARATION OF 150 METERS VERSUS MEAN HORIZONTAL WIND SPEED (15 SECND AVERAGES AND ZERO LAG TIME.)

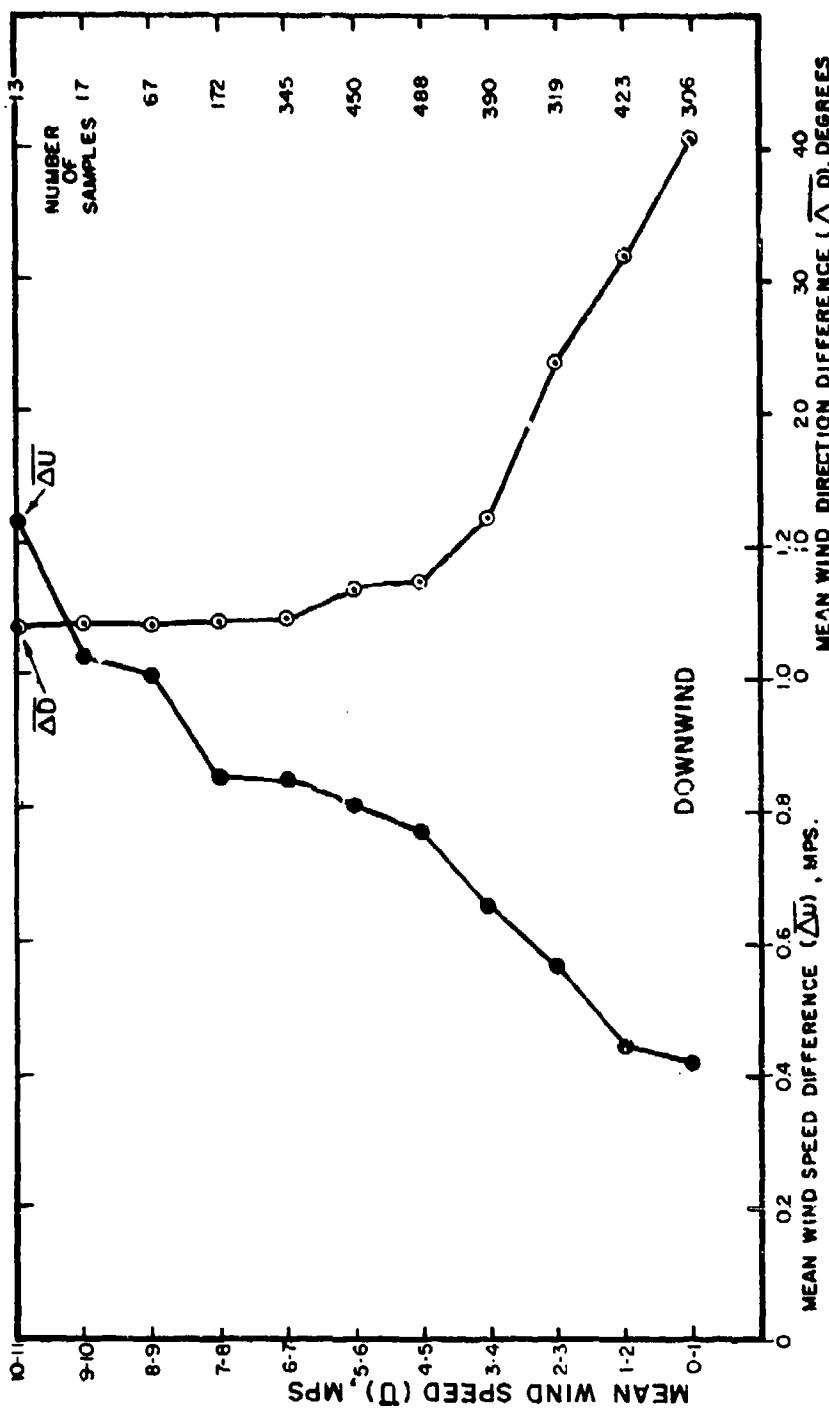


FIG.3. MEAN WIND SPEED AND DIRECTION DIFFERENCE AT A HEIGHT OF 4.0 METERS VERSUS MEAN WIND SPEED WITH A HORIZONTAL DISTANCE SEPARATION OF 175 METERS (ONE MINUTE AVERAGE AND ZERO LAG TIME.)

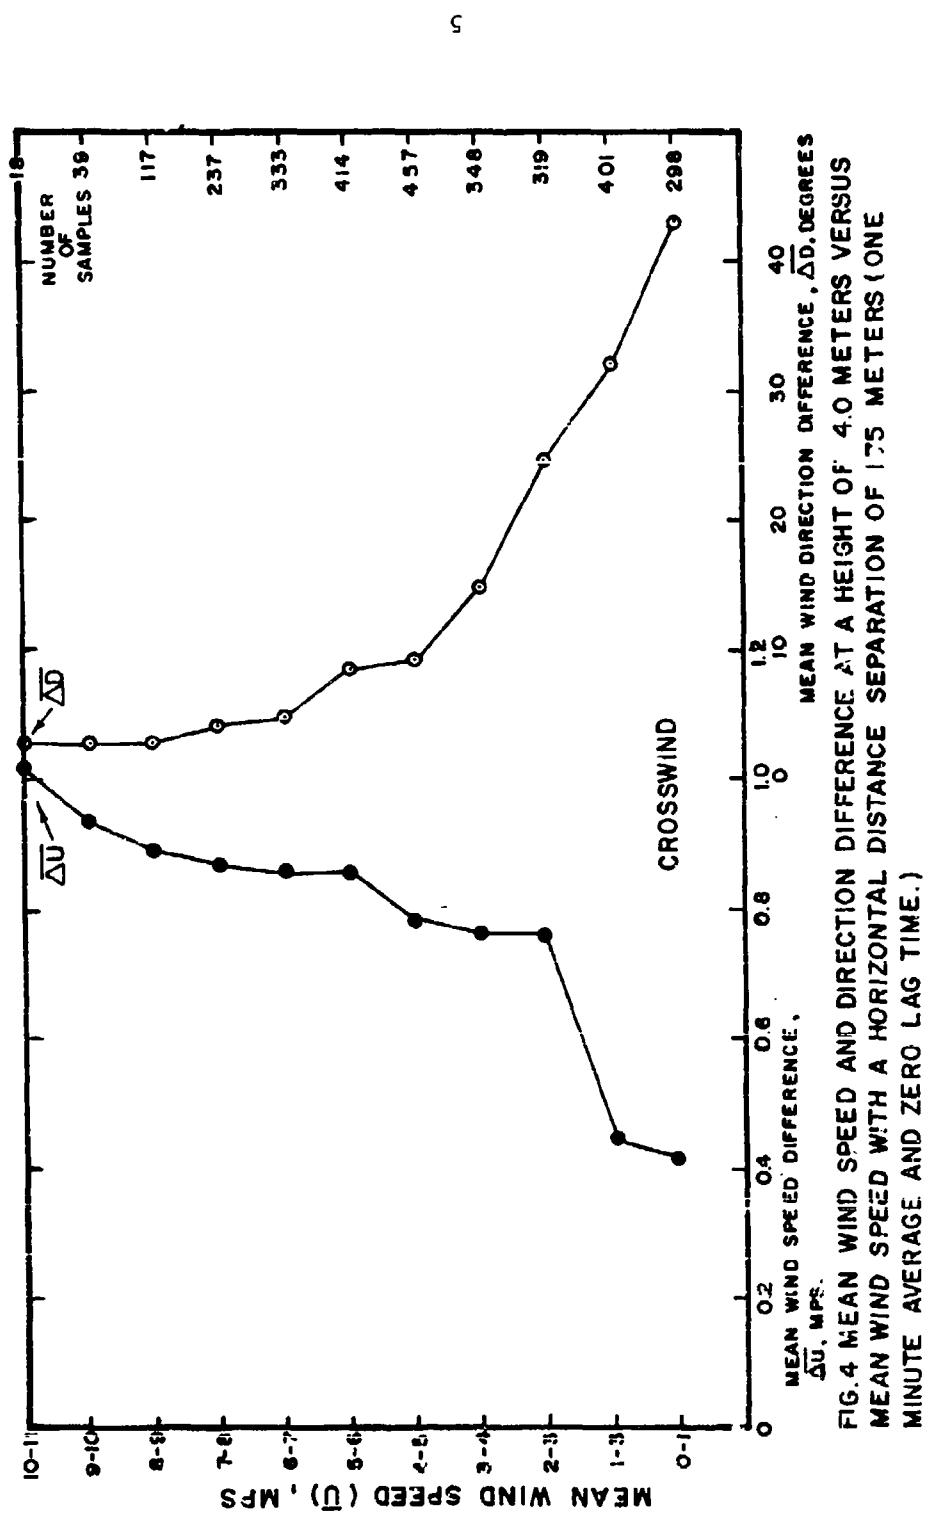


FIG. 4. MEAN WIND SPEED AND DIRECTION DIFFERENCE AT A HEIGHT OF 4.0 METERS VERSUS MEAN WIND SPEED WITH A HORIZONTAL DISTANCE SEPARATION OF 175 METERS (ONE MINUTE AVERAGE AND ZERO LAG TIME.)

150 meters, and 15-second averages are used at zero lag time. The number of samples available for each interval of mean wind speed is shown on the right side of the graphs, and it can be noted that this number drops off quite rapidly at wind speeds greater than 6 mps. In Figure 1, the sensors were on a line approximately normal, whereas in Figure 2 the sensor line was approximately parallel to the mean wind direction. In each figure the direction difference decreased rapidly from about 55 degrees to about 10 degrees, with a mean wind speed increase from near zero to 3-4 mps, then decreases less rapidly with further mean wind speed increases.

In contrast, there is a gradual increase in speed difference with a mean wind speed increase from near zero to 3-4 mps, then a more rapid increase in speed difference with further mean wind speed increase. There does not appear to be a significant difference due to the difference in alignment of the sensors, parallel or normal to the mean wind direction, in this situation. The variation of wind speed and direction difference is very much the same in Figures 3 and 4 in which the height of the sensors was 4.0 meters, horizontal distance separation between wind measurements was 175 meters, and a 1-minute average wind was used with a zero lag time. Direction difference decreases rapidly from about 40 degrees at near zero to about 8 degrees at 5 mps mean wind speed, the decrease becoming more gradual with further increase in wind speed. The mean speed difference increases with increase in mean wind speed from about 0.4 mps at 1-2 mps mean wind to approximately 1.0 mps at 9-10 mps.

The effect of horizontal distance separation from 25 to 300 meters on the mean wind speed difference at various mean wind speeds in both downwind and cross wind situations is presented in Figures 5 and 6. Wind speed differences are greater in the crosswind than in the downwind case, particularly with mean wind speed greater than 6-7 mps. Figures 7 and 8 present the effect of distance separation on the mean wind direction difference at various mean wind speeds. Direction differences are a little greater in the crosswind case, particularly at mean wind speeds less than 6-7 mps; an increase of distance separation from 25 to 300 meters does not increase the wind direction difference significantly except for winds at 3 mps or less.

Figures 9 and 10 show the effects of averaging time from 15 to 600 seconds on wind speed and direction differences at various mean wind speeds at a height of 4 meters, horizontal distance separation of 25 meters, and zero lag time. The greatest wind speed differences in Figure 9 occur with strong mean wind speeds and short averaging time. A change in averaging time does not affect the speed differences significantly at mean wind speeds less than about 5-6 mps. It is significant that when the mean wind

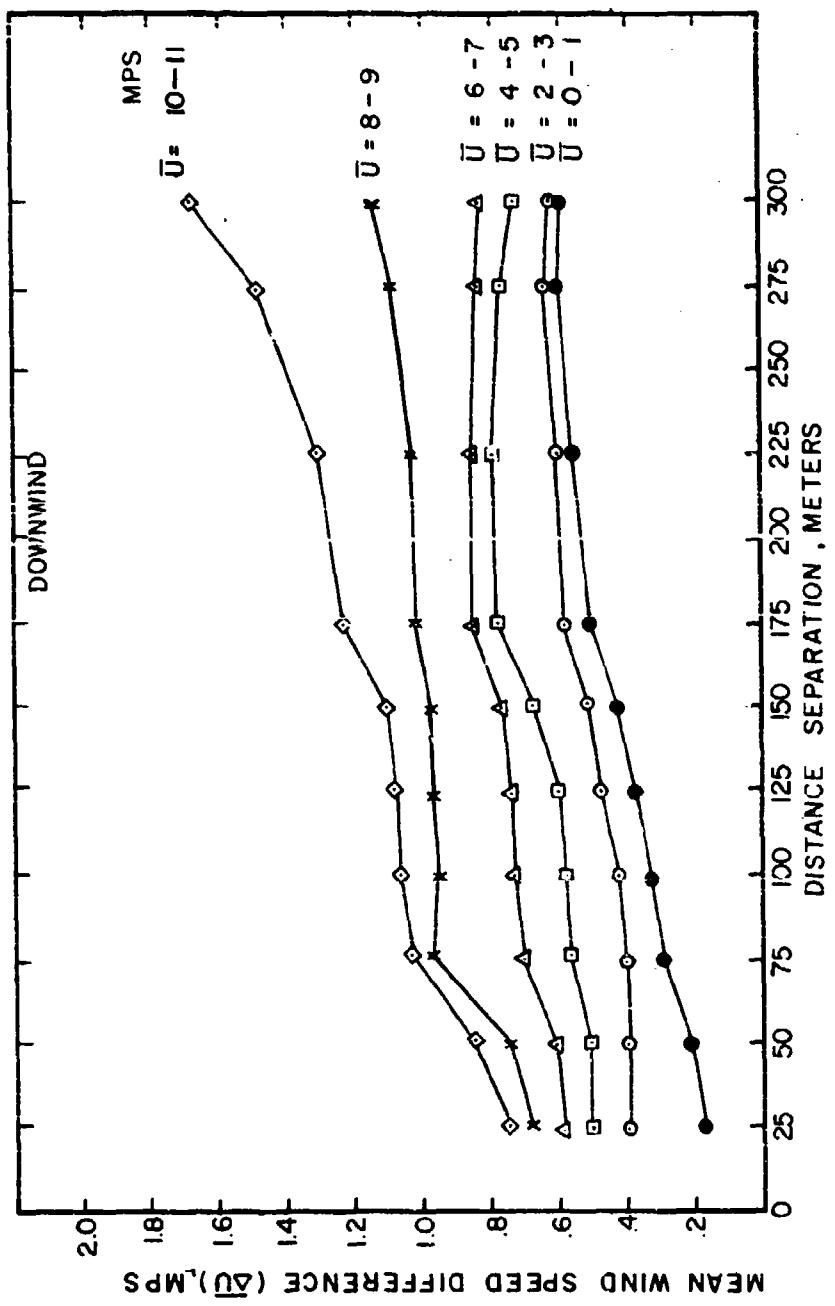


FIG. 5 MEAN WIND SPEED DIFFERENCE VERSUS HORIZONTAL DISTANCE SEPARATION
AT A HEIGHT OF 4 METERS AT VARIOUS MEAN WIND SPEEDS (ONE MINUTE
AVERAGES AT ZERO LAG TIME).

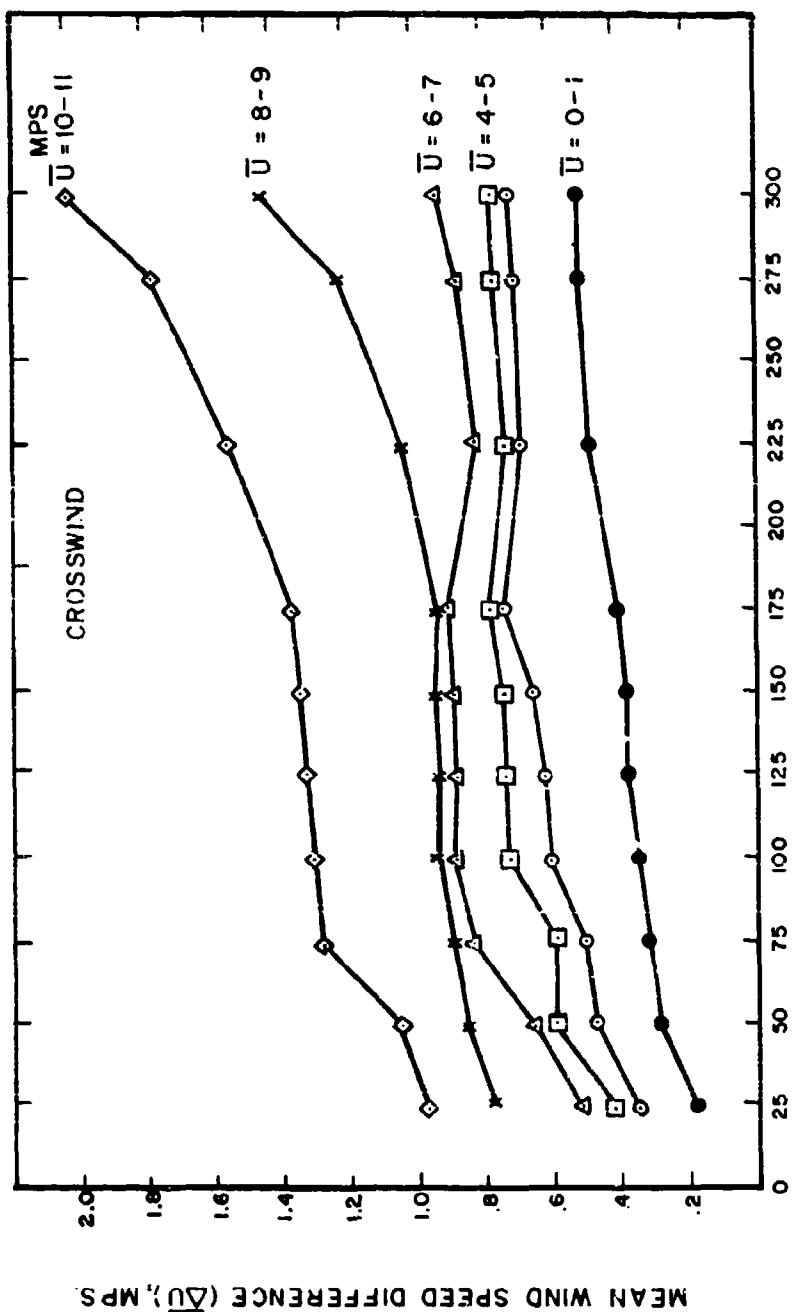


FIG. 6 MEAN WIND SPEED DIFFERENCE VERSUS HORIZONTAL DISTANCE SEPARATION
AT A HEIGHT OF 4 METERS AT VARIOUS MEAN WIND SPEEDS (ONE MINUTE AVERAGES
AT ZERO LAG TIME.)

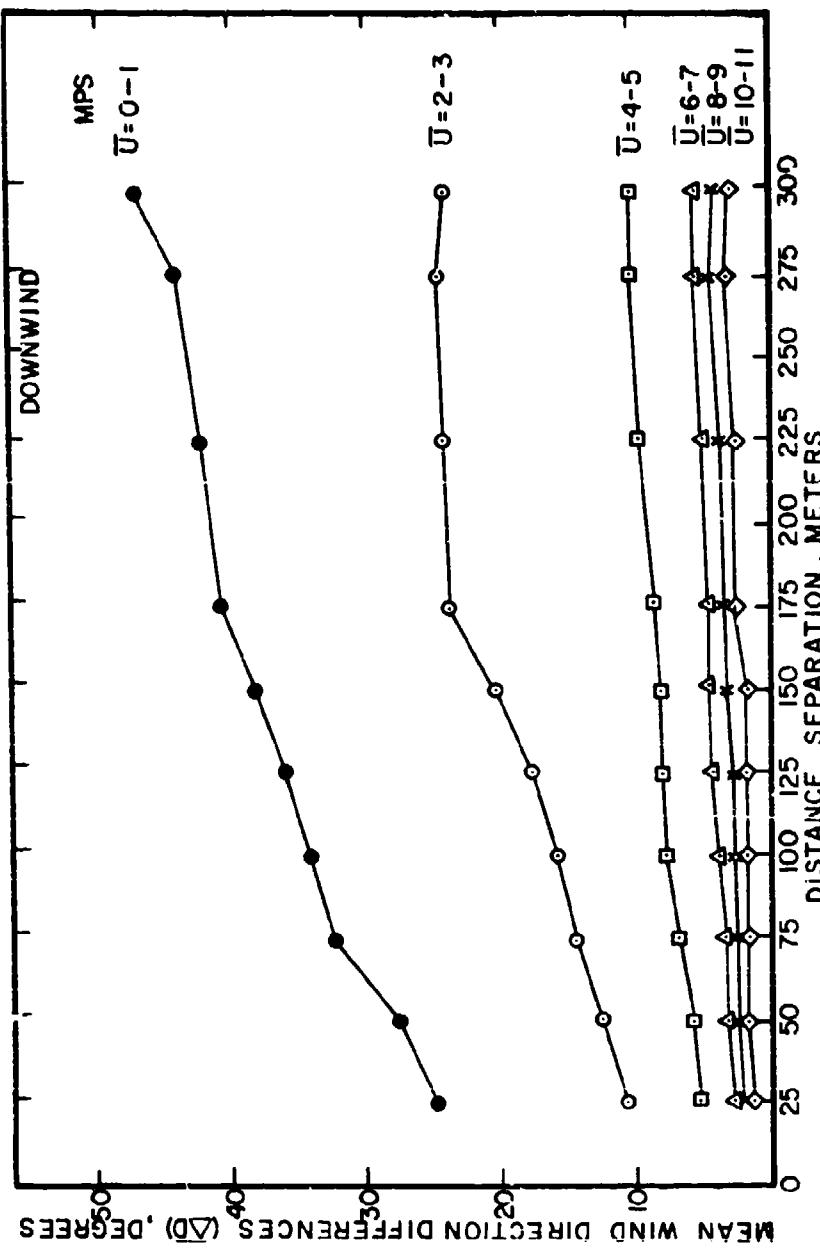


FIG. 7 MEAN WIND DIRECTION DIFFERENCE VERSUS HORIZONTAL DISTANCE SEPARATION
AT A HEIGHT OF 4 METERS AT VARIOUS MEAN SPEEDS (ONE MINUTE AVERAGES AT ZERO
LAG TIME.)

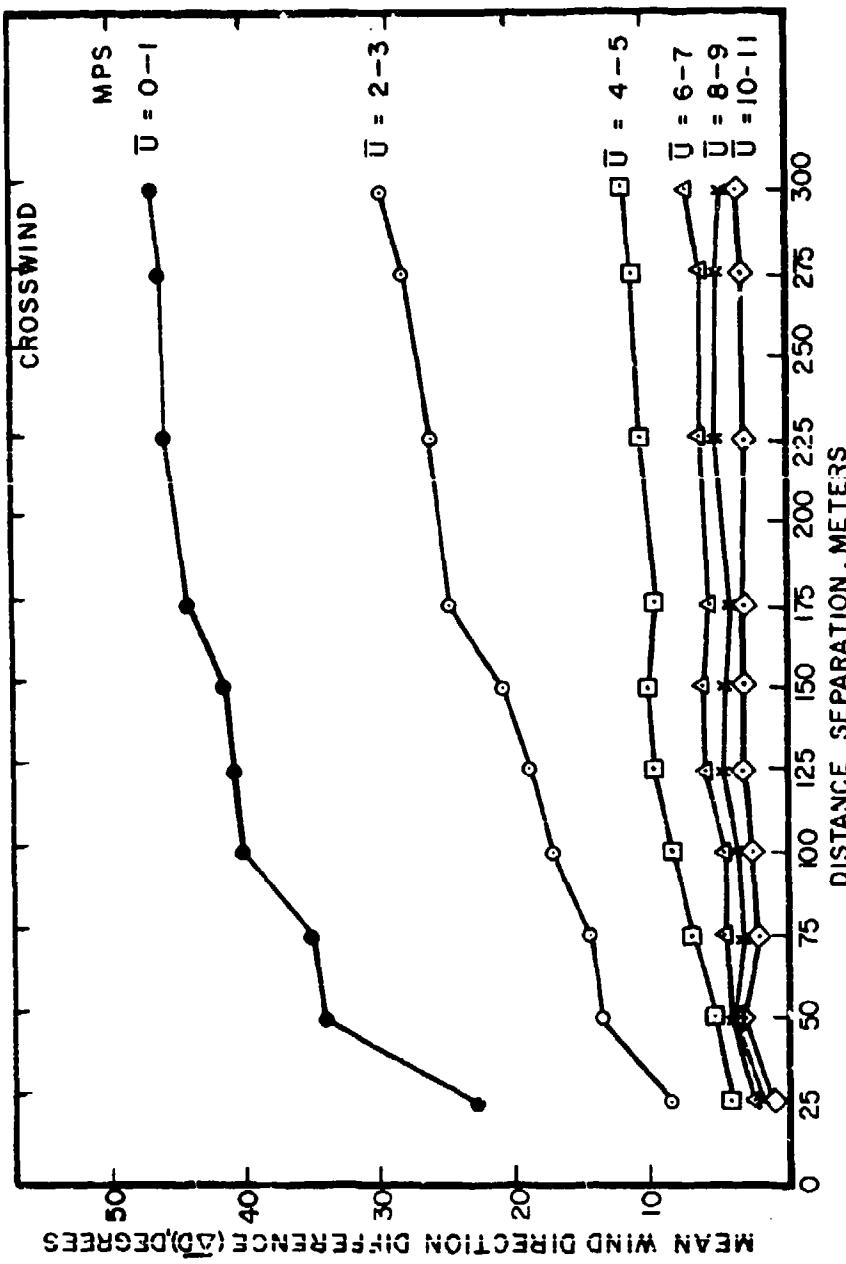


FIG. 8 MEAN WIND DIRECTION DIFFERENCE VERSUS HORIZONTAL DISTANCE SEPARATION
AT A HEIGHT OF 4 METERS AT VARIOUS MEAN WIND SPEEDS (ONE MINUTE AVERAGES
AT ZERO LAG TIME)

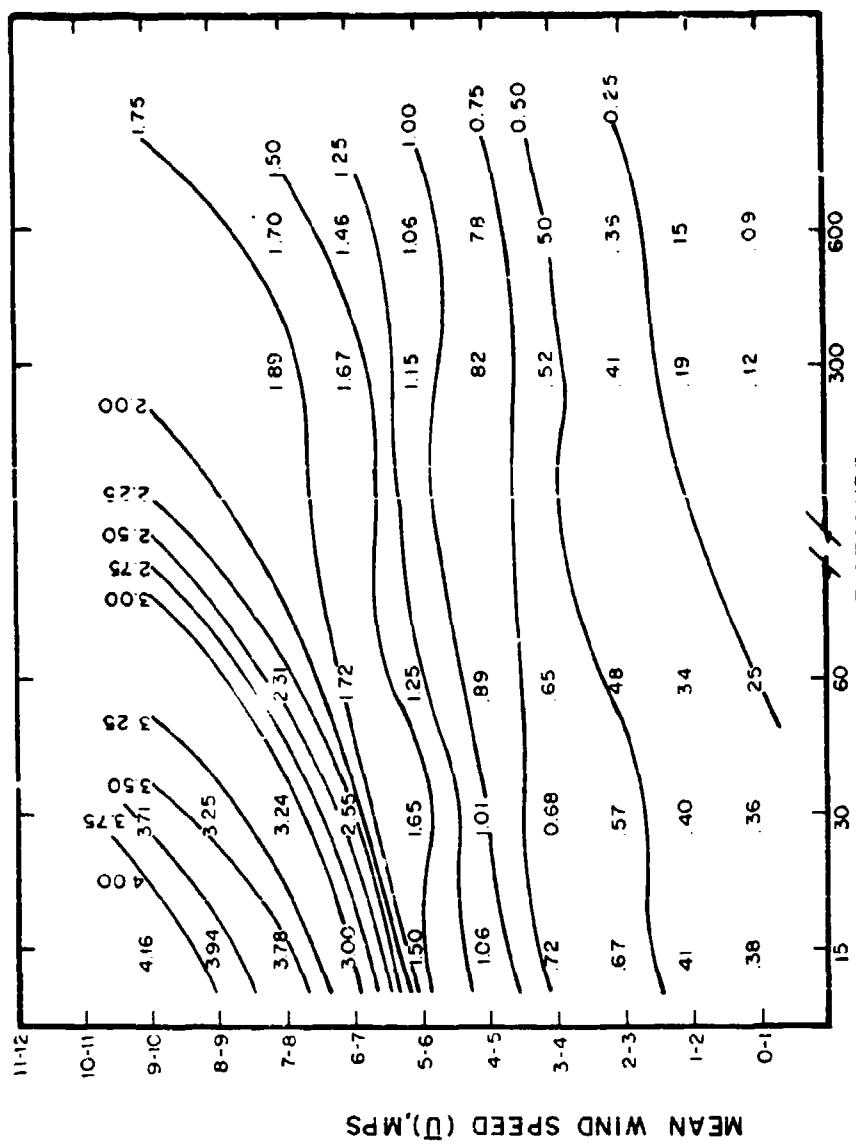


FIG. 9 MEAN WIND SPEED DIFFERENCE VERSUS MEAN WIND SPEED AT A HEIGHT OF 4 METERS AND ZERO SEPARATION OF 25 METERS, AND ZERO AG TIME.

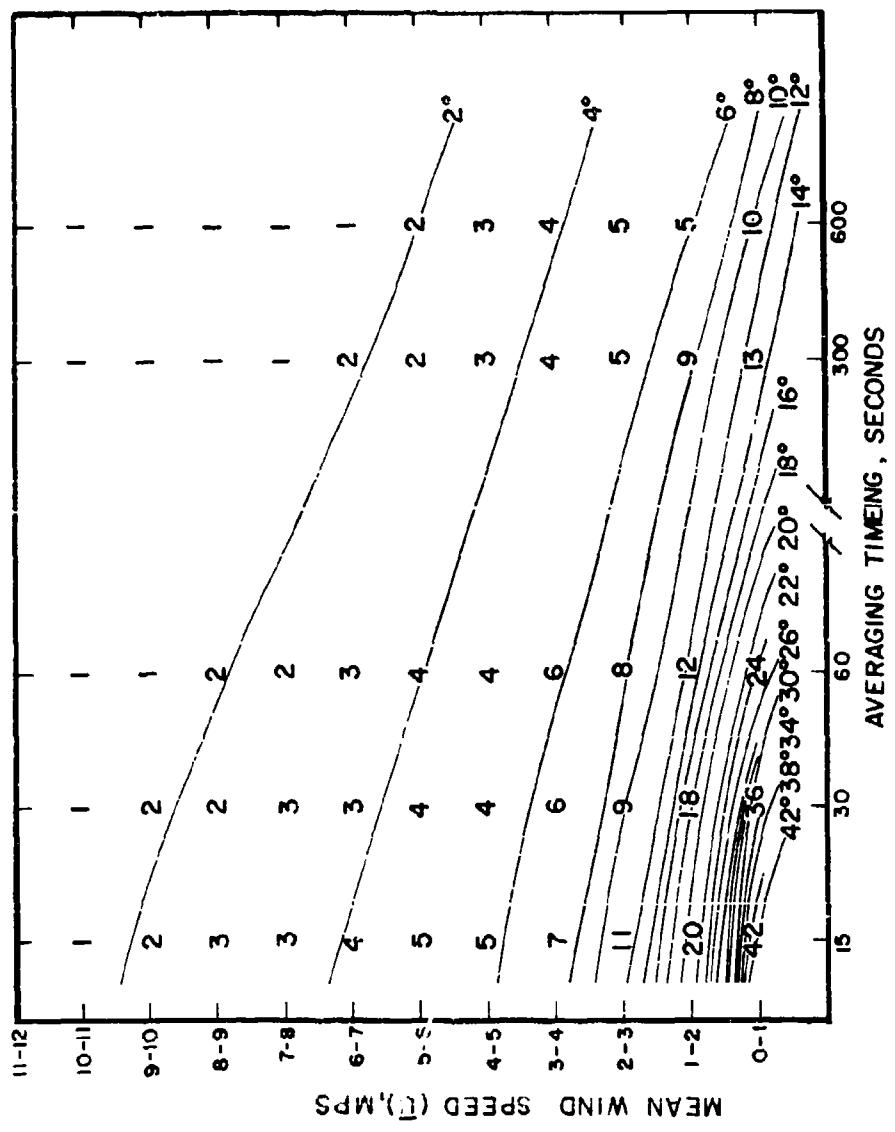


FIG. 10 MEAN WIND DIRECTION DIFFERENCE, VERSUS AVERAGING TIME AND MEAN WIND SPEED AT A HEIGHT OF 4 METERS AND DISTANCE SEPARATION OF 25 METERS, AND ZERO LAG TIME.

speed is 3 to 4 mps there is very little, if any, change in wind speed difference with a change in averaging time from 15 to 600 seconds. Mean wind speeds of this magnitude occur predominantly during neutral stability conditions. Figure 10 shows that the greatest wind direction differences occur with light mean winds and short averaging time. A change in averaging time has the greatest effect on wind direction differences under light wind conditions.

Figures 11 and 12 present wind speed and direction differences versus lag time from 0 to 7200 seconds at various mean wind speeds. An increase in lag time causes an increase in wind speed and direction differences at all mean wind speeds up to a lag of 3600 seconds. Wind direction and speed difference variation in Figures 11 and 12 is quite similar to the variation as a function of lag time found by Armendariz and Lang [7], except that the differences in direction and speed are somewhat less. This is probably due to the smaller horizontal distance separation (75 meters) used here than the separation (275 meters) used by Armendariz and Lang [7].

Figure 13 presents mean wind speed and direction differences at a height of 1.5 meters and a horizontal distance separation of 150 meters versus the mean temperature difference between heights of 4.0 and 0.5 meters. An absolute difference in temperature was obtained by subtracting the magnitude of the temperature at the 0.5 meter level from the magnitude of the temperature at the 4.0 meter level. Therefore a negative value indicates a lapse condition and a positive value an inversion. The wind speed difference is greatest under steep lapse conditions, decreasing to the least difference during a strong inversion. This is most likely to be due to the fact that generally strong winds occur under neutral and steep lapse conditions and light winds during a strong inversion. Mean wind direction differences are about 25 degrees under unstable conditions decreasing to near 10 degrees under neutral conditions, and increasing to 30-35 degrees under stable conditions. This is expected since wind direction is most steady, or varies least, during strong winds which occur during near-neutral conditions, whereas the direction varies greatest under unstable conditions and under light winds which are common during very stable conditions.

The T-Array data were recorded on magnetic tape in wind components. The horizontal wind was computed in longitudinal (u) and lateral (v) components, where the longitudinal (u) component was parallel and the lateral (v) component was perpendicular to the mean wind direction. Mean values of the longitudinal and lateral wind differences $\bar{\Delta}u$ and $\bar{\Delta}v$ and their standard deviations $s_{\Delta u}$ and $s_{\Delta v}$ were computed, plotted versus horizontal distance separation, averaging time, lag time, and thermal stability, and classified as to downwind or crosswind directions.

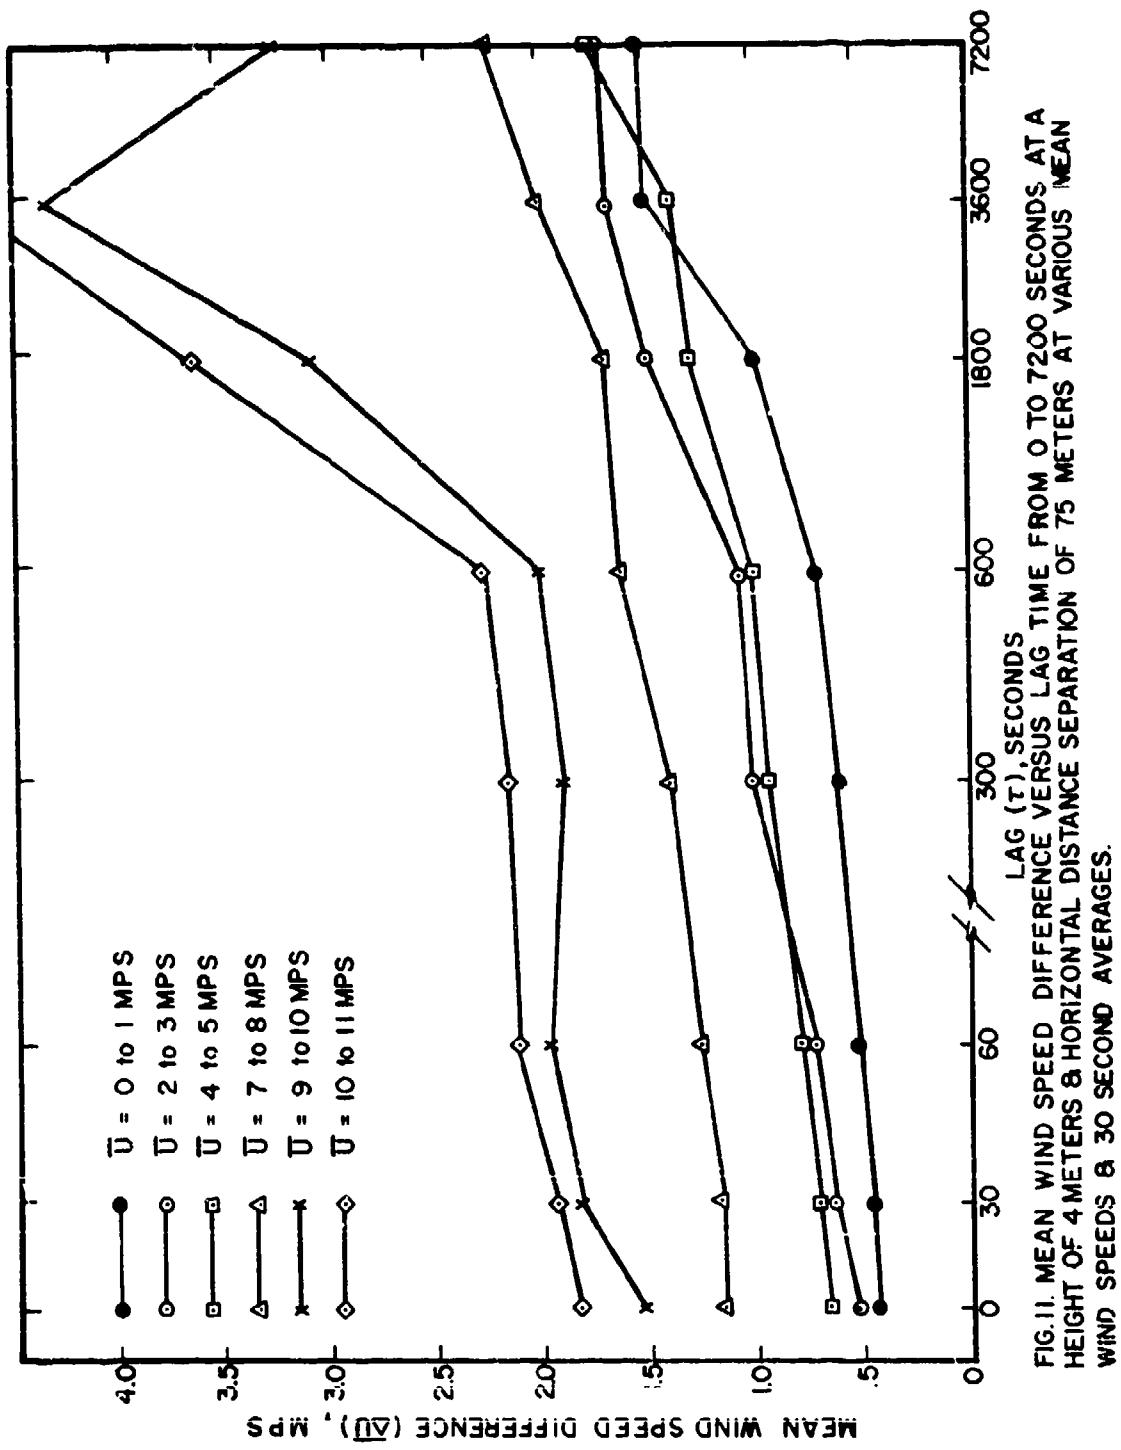


FIG. 11. MEAN WIND SPEED DIFFERENCE VERSUS LAG TIME FROM 0 TO 7200 SECONDS AT A HEIGHT OF 4 METERS & HORIZONTAL DISTANCE SEPARATION OF 75 METERS AT VARIOUS MEAN WIND SPEEDS & 30 SECOND AVERAGES.

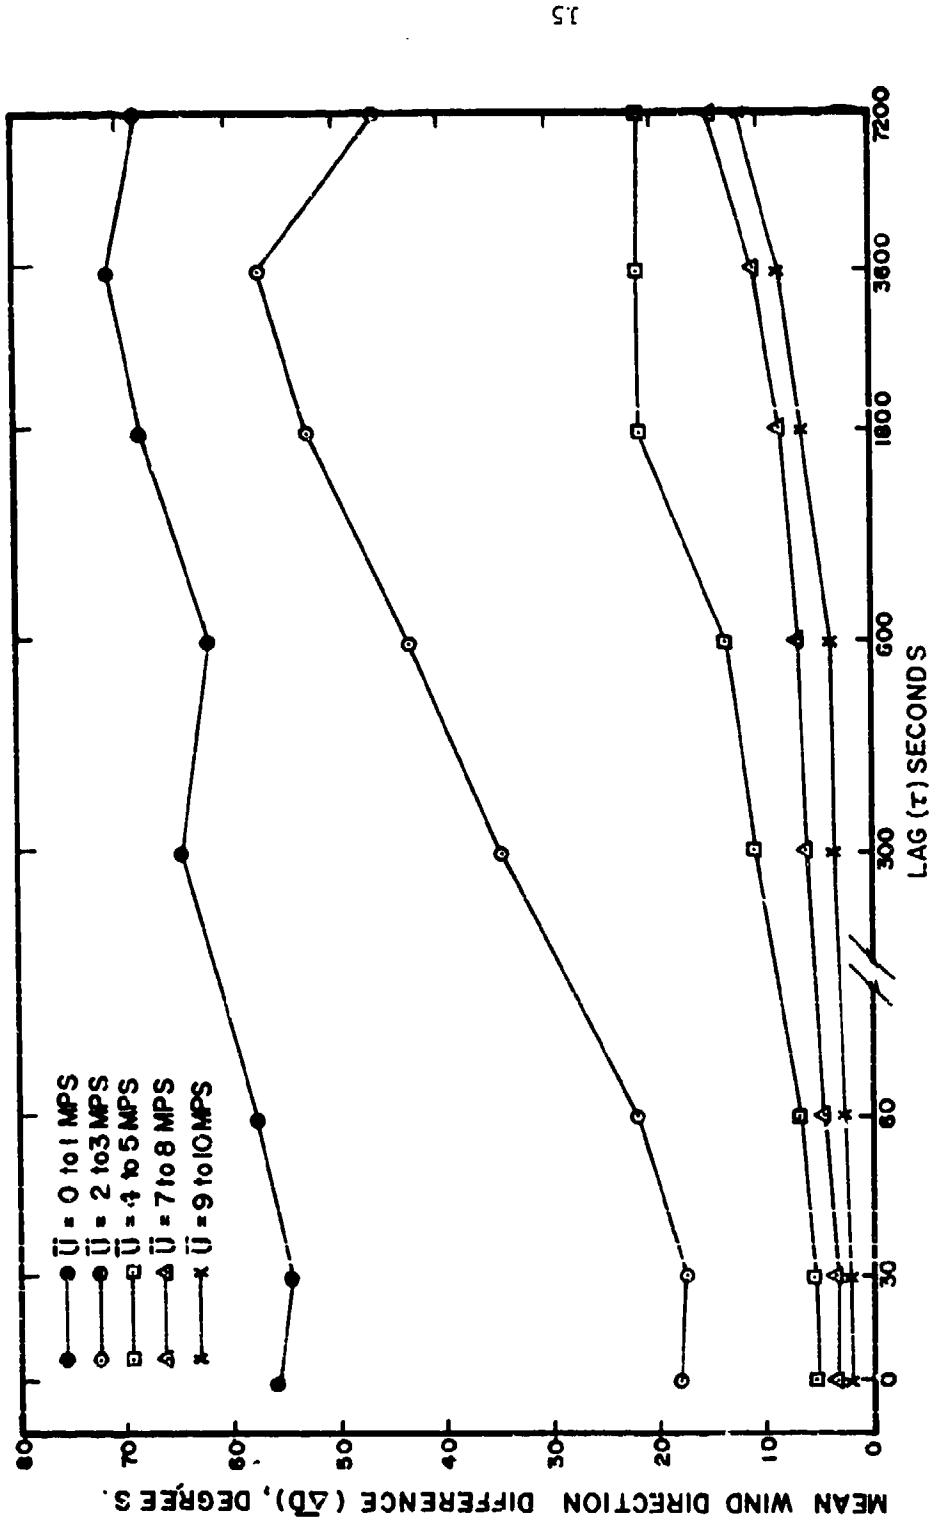


FIG. 12 MEAN WIND DIRECTION DIFFERENCES VERSUS LAG TIME FROM 0 TO 7200 SECONDS AT A HEIGHT OF 4 METERS AND A HORIZONTAL DISTANCE SEPARATION OF 75 METERS AT VARIOUS MEAN WIND SPEEDS & 30 SECOND AVERAGE.

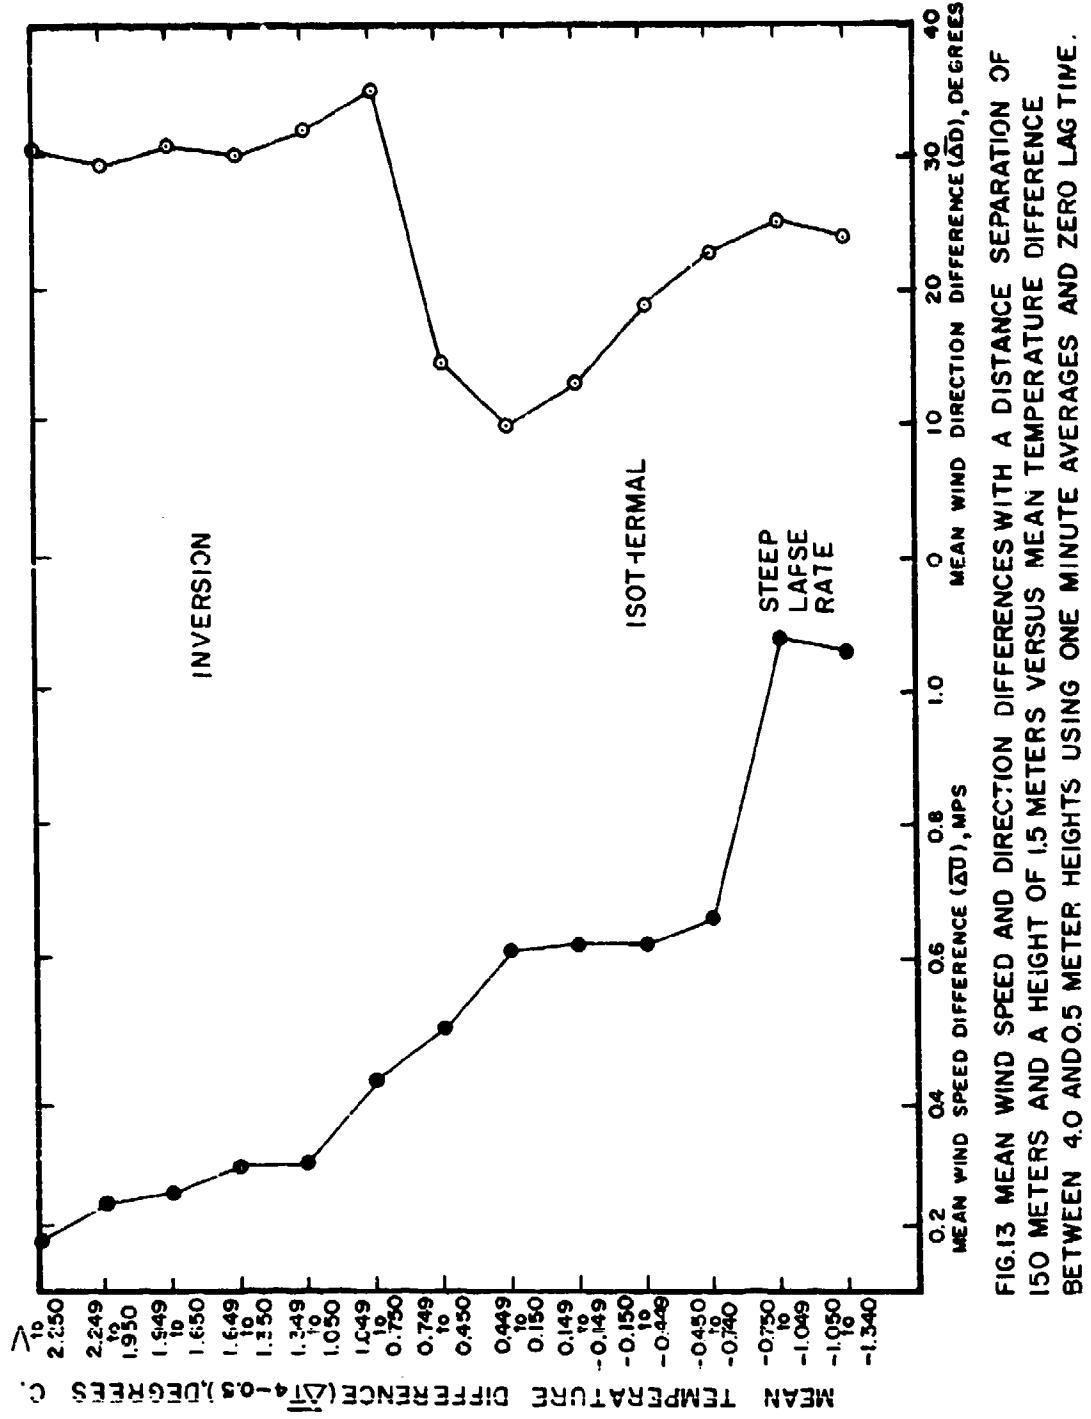


FIG.13 MEAN WIND SPEED AND DIRECTION DIFFERENCES WITH A DISTANCE SEPARATION OF 150 METERS AND A HEIGHT OF 1.5 METERS VERSUS MEAN TEMPERATURE DIFFERENCE BETWEEN 4.0 AND 0.5 METER HEIGHTS USING ONE MINUTE AVERAGES AND ZERO LAG TIME.

Figure 14 presents mean longitudinal and lateral wind component differences and their standard deviations as a function of horizontal distance separation for a height of 4.0 meters. There is a significant increase in Δu and Δv as distance separation increases from 25 to 100 meters, then very little change from 100 to 300 meters. Standard deviations of Δu and Δv vary in about the same manner. Generally longitudinal wind component differences vary similarly to mean wind speed differences, and lateral wind component differences vary similarly to wind direction differences as shown in Figures 5-8.

SUMMARY

At heights of 1.5 and 4.0 meters with a mean wind speed of 4 mps or less and distance separation of 150 to 175 meters, wind speed differences are less than 0.8 mps but wind direction differences are quite large (10 to 50 degrees). Conversely, with increasing mean winds (5 mps or greater), wind speed differences increase from 1 to 2.5 mps, and direction differences decrease to less than 10 degrees. There is no significant difference between crosswind and downwind situations in this comparison. There does not appear to be a significant change in speed and direction differences with an increase in distance separation from 25 to 300 meters unless the mean wind speed is less than about 4 mps.

A change in averaging time of the wind data from 15 to 600 seconds apparently does not significantly change wind speed differences unless the mean wind speed is 5 mps or greater. With strong mean winds, 10 mps or greater, an increase in averaging time causes a marked decrease in speed differences. Conversely, wind direction differences are greatest with light mean winds and short averaging time (30 seconds or less).

An increase in lag time will increase wind speed differences, the most significant increase occurring when the mean wind speed is greater than 5 mps. This is also generally true for wind direction differences.

The temperature difference (ΔT) between heights of 4.0 and 0.5 meters is an indication of thermal stability of that particular layer. Wind speed differences are greatest under steep lapse rate conditions; since strong gusty winds are common at WSMR during this type of temperature regime, large speed differences are expected. Wind direction differences are least under near-isothermal (or neutral stability) conditions, and greatest during inversion when winds are light.

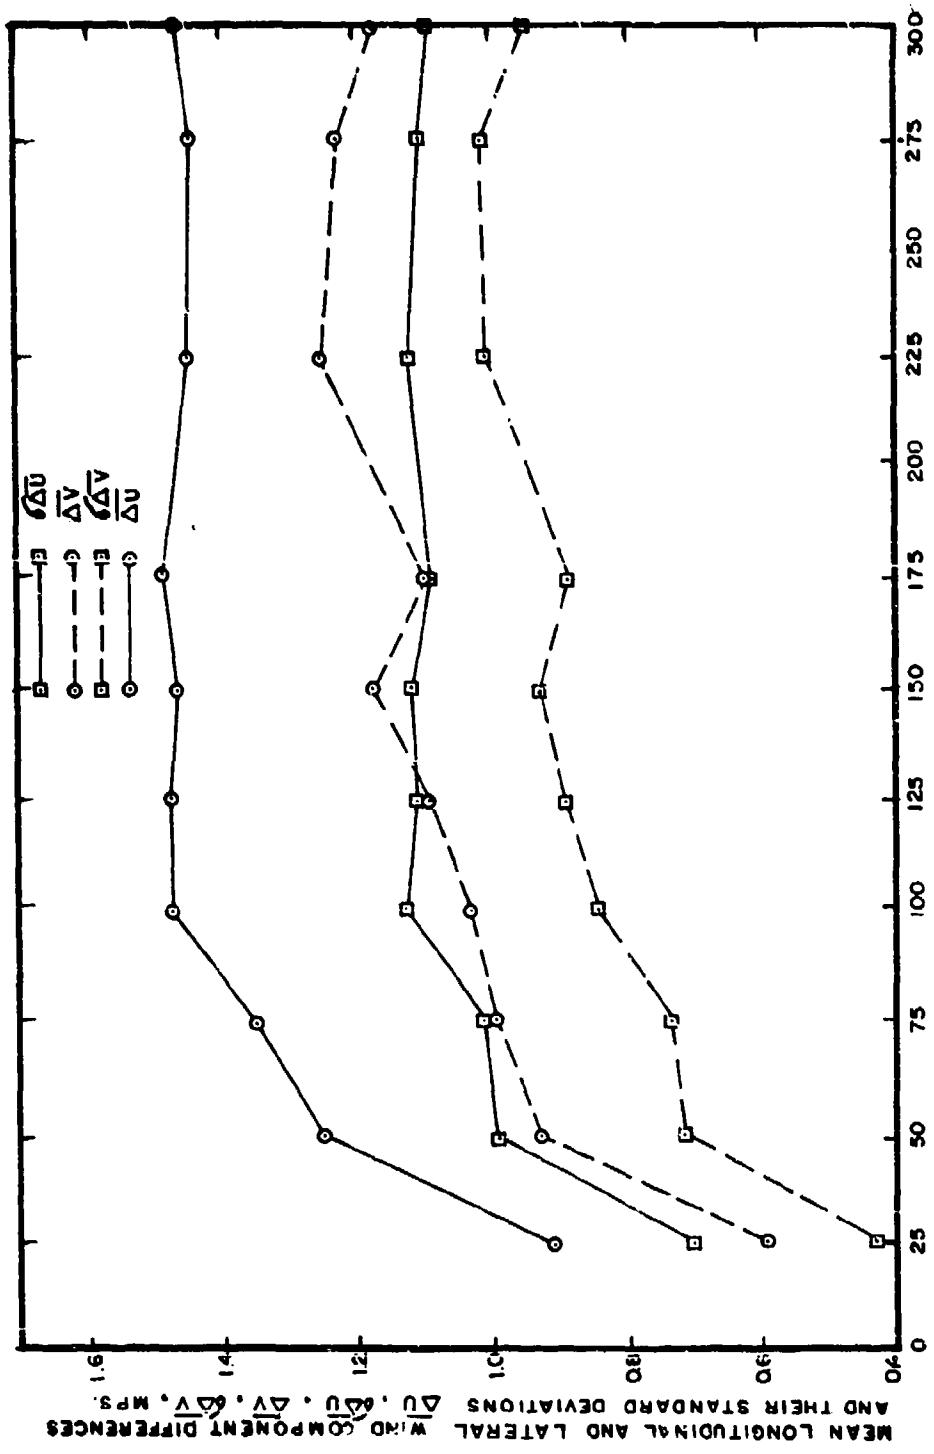


FIG. 14 MEAN LONGITUDINAL AND LATERAL WIND COMPONENT DIFFERENCES AND STANDARD DEVIATION AT A HEIGHT OF 4.0 METERS VERSUS HORIZONTAL DISTANCE SEPARATION.

LITERATURE CITED

1. Beer, F. P., and Robert G. Sarrubbi, 1962, "The Determination of the Atmospheric Parameters Influencing the Trajectory of Free Rockets," Institute of Research, Lehigh University, Bethlehem, Pa., 16 pp.
2. Hertz, John A., and F. P. Beer, 1965, "A Simplified Approach to the Extrapolation of Nonstationary Random Processes," Lehigh University, Bethlehem, Pa., 28 pp.
3. Rachele, Henry, 1962, "Surface Wind Sampling Periods for Unguided Rocket Impact Prediction," MM-458, US Army Electronics Research and Development Activity, White Sands Missile Range, New Mexico, 30 pp.
4. Karna, Chetan L., J. A. Hertz, and F. P. Beer, 1966, "Extrapolation in Time of the Response of Free Rockets to Random Stationary Wind Velocity Profiles," Institute of Research, Lehigh University, Bethlehem, Pa., 19 pp.
5. Rachele, Henry, and Manual Armendariz, 1967, "Surface Wind Sampling for Unguided Rocket Impact Prediction," J. Appl. Meteor., 6, 516-518.
6. Armendariz, M., L. J. Rider, G. S. Campbell, D. L. Favier, and Juana Serna, 1971, "Turbulence Measurements from a T-Array of Meteorological Sensors," ECOM-5362, Atmospheric Sciences Laboratory, US Army Electronics Command, White Sands Missile Range, New Mexico, 869 pp.
7. Armendariz, M., and Virgil D. Lang, 1968, "Wind Correlation and Variability in Time and Space," ECOM-5201, Atmospheric Sciences Laboratory, US Army Electronics Command, White Sands Missile Range, New Mexico, 26 pp.

ATMOSPHERIC SCIENCES RESEARCH PAPERS

1. Miers, B. T., and J. E. Morris, Mesospheric Winds Over Ascension Island in January, July 1970, ECOM-5312, AD 711851.
2. Webb, W. L., Electrical Structure of the D- and E-Region, July 1970, ECOM-5313, AD 714365.
3. Campbell, G. S., F. V. Hansen and R. A. Duse, Turbulence Data Derived from Measurements on the 32-Meter Tower Facility, White Sands Missile Range, New Mexico, July 1970, ECOM-5314, AD 711852.
4. Pries, T. H., Strong Surface Wind Gusts at Holloman AFB (March-May), July 1970, ECOM-5315, AD 711853.
5. D'Arcy, E. M., and B. F. Engebos, Wind Effects on Unguided Rockets Fired Near Maximum Range, July 1970, ECOM-5317, AD 711854.
6. Matonis, K., Evaluation of Tower Antenna Pedestal for Weather Radar Set AN/TPS-41, July 1970, ECOM-5317, AD 711520.
7. Monahan, H. H., and M. Armendariz, Gust Factor Variations with Height and Atmospheric Stability, August 1970, ECOM-5320, AD 711855.
8. Stenmark, E. B., and L. D. Drury, Micrometeorological Field Data from Davis, California; 1966-67 Runs Under Non-Advection Conditions, August 1970, ECOM-6051, AD 726390.
9. Stenmark, E. B., and L. D. Drury, Micrometeorological Field Data from Davis, California; 1966-67 Runs Under Advection Conditions, August 1970, ECOM-6052, AD 724612.
10. Stenmark, E. B., and L. D. Drury, Micrometeorological Field Data from Davis, California; 1967 Cooperative Field Experiment Runs, August 1970, ECOM-6053, AD 724613.
11. Rider, L. J., and M. Armendariz, Nocturnal Maximum Winds in the Planetary Boundary Layer at WSMR, August 1970, ECOM-5321, AD 712325.
12. Hansen, F. V., A Technique for Determining Vertical Gradients of Wind and Temperature for the Surface Boundary Layer, August 1970, ECOM-5324, AD 714366.
13. Hansen, F. V., An Examination of the Exponential Power Law in the Surface Boundary Layer, September 1970, ECOM-5326, AD 715349.
14. Miller, W. B., A. J. Blanco and L. E. Taylor, Impact Deflection Estimators from Single Wind Measurements, September 1970, ECOM-5328, AD 716993.
15. Duncan, L. D., and R. K. Walters, Editing Radiosonde Angular Data, September 1970, ECOM-5330, AD 715351.
16. Duncan, L. D., and W. J. Vechione, Vacuum Tube Launchers and Boosters, September 1970, ECOM-5331, AD 715350.
17. Stenmark, E. B., A Computer Method for Retrieving Information on Articles, Reports and Presentations, September 1970, ECOM-6050, AD 724611.
18. Hudlow, M., Weather Radar Investigation on the BOMEX, September 1970, ECOM-3329, AD 714191.
19. Combs, A., Analysis of Low-Level Winds Over Vietnam, September 1970, ECOM-3346, AD 876935.
20. Rinehart, G. S., Humidity Generating Apparatus and Microscope Chamber for Use with Flowing Gas Atmospheres, October 1970, ECOM-5332, AD 716994.
21. Miers, B. T., R. O. Olsen, and E. P. Avara, Short Time Period Atmospheric Density Variations and a Determination of Density Errors from Selected Rocketsonde Sensors, October 1970, ECOM-5335.
22. Rinehart, G. S., Sulfates and Other Water Solubles Larger than 0.15μ Radius in a Continental Nonurban Atmosphere, October 1970, ECOM-5336, AD 716999.
23. Lindberg, J. D., The Uncertainty Principle: A Limitation on Meteor Trail Radar Wind Measurements, October 1970, ECOM-5337, AD 716996.
24. Randhawa, J. S., Technical Data Package for Rocket-Borne Ozone-Temperature Sensor, October 1970, ECOM-5338, AD 716997.

25. Devine, J. C., The Fort Huachuca Climate Calendar, October 1970, ECOM-6054.
26. Allen, J. T., Meteorological Support to US Army RDT&E Activities, Fiscal Year 1970 Annual Report, November 1970, ECOM-6055.
27. Shinn, J. H., An Introduction to the Hyperbolic Diffusion Equation, November 1970, ECOM-5341, AD 718616.
28. Avara, E. P., and M. Kays., Some Aspects of the Harmonic Analysis of Irregularly Spaced Data, November 1970, ECOM-5344, AD 720198.
29. Fabrici, J., Inv. of Isotopic Emitter for Nuclear Barometer, November 1970, ECOM-3349, AD 876461.
30. Levine, J. R., Summer Mesoscale Wind Study in the Republic of Vietnam, December 1970, ECOM-3375, AD 721585.
31. Petriw, A., Directional Ion Anemometer, December 1970, ECOM-3379, AD 720573.
32. Randhawa, J. S., B. H. Williams, and M. D. Kays, Meteorological Influence of a Solar Eclipse on the Stratosphere, December 1970, ECOM-5345, AD 720199.
33. Nordquist, Walter S., Jr., and N. L. Johnson, One-Dimensional Quasi-Time-Dependent Numerical Model of Cumulus Cloud Activity, December 1970, ECOM-5350, AD 722216.
34. Avara, E. P., The Analysis of Variance of Time Series Data Part I: One-Way Layout, January 1971, ECOM-5352, AD 721594.
35. Avara, E. P., The Analysis of Variance of Time Series Data Part II: Two-Way Layout, January 1971, ECOM-5353.
36. Avara, E. P., and M. Kays., The Effect of Interpolation of Data Upon the Harmonic Coefficients, January 1971, ECOM-5354, AD 721593.
37. Randhawa, J. S., Stratopause Diurnal Ozone Variation, January 1971, ECOM-5355, AD 721309.
38. Low, R. D. H., A Comprehensive Report on Nineteen Condensation Nuclei (Part II), January 1971, ECOM-5358.
39. Armendariz, M., L. J. Rider, G. Campbell, D. Favier and J. Seina, Turbulence Measurements from a T-Array of Sensors, February 1971, ECOM-5362, AD 726390.
40. Maynard, H., A Radix-2 Fourier Transform Program, February 1971, ECOM-5363, AD 726389.
41. Devine, J. C., Snowfalls at Fort Huachuca, Arizona, February 1971, ECOM-6056.
42. Devine, J. C., The Fort Huachuca, Arizona 15 Year Base Climate Calendar (1956-1970), February 1971, ECOM-6057.
43. Levine, J. R., Reduced Ceilings and Visibilities in Korea and Southeast Asia, March 1971, ECOM-3403, AD 722735.
44. Gerber, H., et al., Some Size Distribution Measurements of AgI Nuclei with an Aerosol Spectrometer, March 1971, ECOM-3414, AD 729331.
45. Engebos, B. F., and L. J. Rider, Vertical Wind Effects on the 2.75-inch Rocket, March 1971, ECOM-5365, AD 726321.
46. Rinehart, G. S., Evidence for Sulfate as a Major Condensation Nucleus Constituent in Nonurban Fog, March 1971, ECOM-5366.
47. Kennedy, B. W., E. P. Avara, and B. T. Miers, Data Reduction Program for Rock-etsonde Temperatures, March 1971, ECOM-5367.
48. Hatch, W. H., A Study of Cloud Dynamics Utilizing Stereoscopic Photogrammetry, March 1971, ECOM-5368.
49. Williamson, L. E., Project Gun Probe Captive Impact Test Range, March 1971, ECOM-5369.
50. Henley, D. C., and G. B. Hoidale, Attenuation and Dispersion of Acoustic Energy by Atmospheric Dust, March 1971, ECOM-5370, AD 728103.
51. Cionco, R. M., Application of the Ideal Canopy Flow Concept to Natural and Artificial Roughness Elements, April 1971, ECOM-5372, AD 730638.
52. Randhawa, J. S., The Vertical Distribution of Ozone Near the Equator, April 1971, ECOM-5373.
53. Ethridge, G. A., A Method for Evaluating Model Parameters by Numerical Inversion, April 1971, ECOM-5374.

54. Collett, E., Stokes Parameters for Quantum Systems, April 1971, ECOM-3415, AD 729347.

55. Shinn, J. H., Steady-State Two-Dimensional Air Flow in Forests and the Disturbance of Surface Layer Flow by a Forest Wall, May 1971, ECOM-5383, AD 730681.

56. Miller, W. B., On Approximation of Mean and Variance-Covariance Matrices of Transformations of Joint Random Variables, May 1971, ECOM-5384, AD 730302.

57. Duncan, L. D., A Statistical Model for Estimation of Variability Variances from Noisy Data, May 1971, ECOM-5385.

58. Pries, T. H., and G. S. Campbell, Spectral Analyses of High Frequency Atmospheric Temperature Fluctuations, May 1971, ECOM-5387.

59. Miller, W. B., A. J. Blanco, and L. E. Taylor, A Least-Squares Weighted-Layer Technique for Prediction of Upper Wind Effects on Unguided Rockets, June 1971, ECOM-5388, AD 729792.

60. Rubio, R., J. Smith and D. Maxwell, A Capacitance Electron Density Probe, June 1971, ECOM-5390.

61. Duncan, L. D., Redundant Measurements in Atmospheric Variability Experiments, June 1971, ECOM-5391.

62. Engebos, B. F., Comparisons of Coordinate Systems and Transformations for Trajectory Simulations, July 1971, ECOM-5397.

63. Hudlow, M. D., Weather Radar Investigations on an Artillery Test Conducted in the Panama Canal Zone, July 1971, ECOM-5411.

64. White, K. O., E. H. Holt, S. A. Schleusener, and R. F. Calfcc, Erbium Laser Propagation in Simulated Atmospheres II. High Resolution Measurement Method, August 1971, ECOM-5398.

65. Waite, R., Field Comparison Between Sling Psychrometer and Meteorological Measuring Set AN/TMQ-22, August 1971, ECOM-5399.

66. Duncan, L. D., Time Series Editing By Generalized Differences, August 1971, ECOM-5400.

67. Reynolds, R. D., Ozone: A Synopsis of its Measurements and Use as an Aemospheric Tracer, August 1971, ECOM-5401.

68. Avara, E. P., and B. T. Miers, Noise Characteristics of Selected Wind and Temperature Data from 30-65 km, August 1971, ECOM-5402.

69. Avara, E. P., and B. T. Miers, Comparison of Linear Trends in Time Series Data Using Regression Analysis, August 1971, ECOM-5403.

70. Miller, W. B., Contributions of Mathematical Structure to the Error Behavior of Rawinsonde Measurements, August 1971, ECOM-5404.

71. Collett, E., Mueller Stokes Matrix Formulation of Fresnel's Equations, August 1971, ECOM-3480.

72. Armendariz, M., and L. J. Rider, Time and Space Correlation and Coherence in the Surface Boundary Layer, September 1971, ECOM-5407.

73. Avara, E. P., Some Effects of Randomization in Hypothesis Testing with Correlated Data, October 1971, ECOM-5408.

74. Randhawa, J. S., Ozone and Temperature Change in the Winter Stratosphere, November 1971, ECOM-5414.

75. Miller, W. B., On Approximation of Mean and Variance-Covariance Matrices of Transformations of Multivariate Random Variables, November 1971, ECOM-5413.

76. Horn, J. D., G. S. Campbell, A. L. Wallis (Capt., USAF), and R. G. McIntyre, Wind Tunnel Simulation and Prototype Studies of Barrier Flow Phenomena, December 1971, ECOM-5416.

77. Dickson, David H., and James R. Oden, Fog Dissipation Techniques for Emergency Use, January 1972, ECOM-5420.

78. Ballard, H. N., N. J. Beyers, B. T. Miers, M. Izquierdo, and J. Whitacre, Atmospheric Tidal Measurements at 50 km from a Constant-Altitude Balloon, December 1971, ECOM-5417.

79. Miller, Walter B., On Calculation of Dynamic Error Parameters for the Rawinsonde and Related Systems, January 1972, ECOM-5422.

80. Richter, Thomas J., Rawin Radar Targets, February 1972, ECOM-5424.
81. Pena, Ricardo, L. J. Rider, and Manuel Armendariz, Turbulence Characteristics at Heights of 1.5, 4.0, and 16.0 Meters at White Sands Missile Range, New Mexico, January 1972, ECOM-5421.
82. Blanco, Abel J., and L. L. Traylor, Statistical Prediction of Impact Displacement due to the Wind Effect on an Unguided Artillery Rocket During Powered Flight, March 1972, ECOM-5427.
83. Williams, B. H., R. O. Olsen, and M. D. Kays, Stratospheric-Ionospheric Interaction During the Movement of a Planetary Wave in January 1967, March 1972, ECOM-5428.
84. Schleusener, Stuart A., and Kenneth O. White, Applications of Dual Parameter Analyzers in Solid-State Laser Tests, April 1972, ECOM-5432.
85. Pries, Thomas H., Jack Smith, and Marvin Hamiter, Some Observations of Meteorological Effects on Optical Wave Propagation, April 1972, ECOM 5434.
86. Dickson, D. H., Fogwash I An Experiment Using Helicopter Downwash, April 1972, ECOM-5431.
87. Mason, J. B., and J. D. Lindberg, Laser Beam Behavior on a Long High Path, April 1972, ECOM-5430.
88. Smith, Jack, Thomas H. Pries, Kenneth J. Skipka, and Marvin Hamiter, Optical Filter Function for a Folded Laser Path, April 1972, ECOM-5433.
89. Lee, Robert P., Artillery Sound Ranging Computer Simulations, May 1972, ECOM-5441.
90. Lowenthal, Marvin J., The Accuracy of Ballistic Density Departure Tables 1934-1972, April 1972, ECOM-5436.
91. Cantor, Israel, Survey of Studies of Atmospheric Transmission from a 4π Light Source to a 2π Receiver, April 1972, ECOM-5436.
92. Barr, William C., Accuracy Requirements for the Measurement of Meteorological Parameters Which Affect Artillery Fire, April 1972, ECOM-5437.
93. Duchon, C. E., F. V. Brock, M. Armendariz, and J. D. Horn, UVW Anemometer Dynamic Performance Study, May 1972, ECOM-5440.
94. Gomez, R. B., Atmospheric Effects for Ground Target Signature Modeling I. Atmospheric Transmission at 1.06 Micrometers, June 1972, ECOM-5445.
95. Bonner, R. S., A Technical Manual on the Characteristics and Operation of a Cloud Condensation Nuclei Collection/Detection/Recording Instrument, June 1972, ECOM-5447.
96. Horn, J. D., R. D. Reynolds, and T. H. Vonder Haar, Survey of Techniques Used in Display of Sequential Images Received from Geostationary Satellites, June 1972, ECOM-5450.
97. Bonner, R. S., and H. M. White, Microphysical Observations of Fog in Redwood Valley near Arcata-Eureka, California, July 1972, ECOM-5455.
98. Waite, R. W., Reliability Test of Electronics Module of Meteorological Measuring Set AN TMQ-22(XE-4), June 1972, ECOM-5448.
99. Doswell, C. A., III, An Iterative Method for Saturation Adjustment, June 1972, ECOM-5444.
100. Doswell, C. A., III, A Two-Dimensional Short-Range Fog Forecast Model, May 1972, ECOM-5443.
101. Seagraves, Mary Ann B., A General-Purpose Meteorological Rocket Data Reduction Program, August 1972, ECOM-5465.
102. Loveland, Loveland, R. B., J. L. Johnson, and B. D. Hinds, Differential Magnetic Measurements Near Cumulus Clouds, August 1972, ECOM-5463.
103. Cantor, Israel, and Michael Hudlow, Rainfall Effects on Satellite Communications in the K, X, and C Bands, July 1972, ECOM-5459.
104. Randhawa, J. S., Variations in Stratospheric Circulation and Ozone During Selected Periods, August 1972, ECOM-5460.
105. Rider, L. J., Armendariz, Manuel, Mean Horizontal Wind Speed and Direction Variability at Heights of 1.5 and 4.0 Meters Above Ground Level at WSMR, New Mexico, October 1972, ECOM-5466.